


Voice Patch Panel

Techlogiks voice patch panels are the perfect solutions for bringing voice to your cable rack ,pre-configured in 25 and 50 ports and designed specifically for voice grade application.

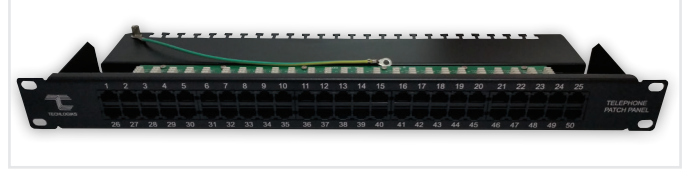

Features

- Design to mount to any standard 19" rack or cabinet
- Space saving ,high-density 1U
- Black Electrostatic Powder-Coated Steel: phosphor bronze with tin plating over
- 110& krone punch down tools are available
- Phosphor bronze with 6-50 micro inches gold plated
- Color Coded TIA/EIA 568A (international) and 568B (AT&T Standard) Wiring For Easy Installation
- Metal sheet: Corrosion resistant steel

Electrical Characteristics

Insulation resistance(minimum)	500MΩ
Contact resistance(maximum)	100mΩ
Return loss (dB)	5.8dB
Next (dB)	4.7dB
Ps next(dB)	5.5dB

Specifications

Panel	Electrostatic Powder Coated Steel
Jack Contacts	Phosphor bronze with gold plated.
Jack Housing	High Temperature Thermoplastic
Conductor Diameters	26 AWG – 22 AWG
Mechanical operation	1500 Matching Cycles

Environmental Characteristics

Temperature	-10°C ~ 60°C
Humidity	10% ~ 90%RH

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
TL-VPP25	25 Ports Voice Patch Panel
TL-VPP50	50 Ports Voice Patch Panel

COPPER PATCH PANEL