


Multi-Mode 62.5/125µ Tight Jacketed Fiber Optic Cable –2F, 4F, 6F, 8F, 12F, 24F Cables

Techlogiks offers the most complete solution for the Indoor application. The tight buffered cables are designed perfectly for inter-equipment connections. These cables have high strength and good banding performance. Nylon/PVC tight buffered fibers up to 900 microns surrounded with strength member Aramid Yarn and overall jacketed with LSZH.

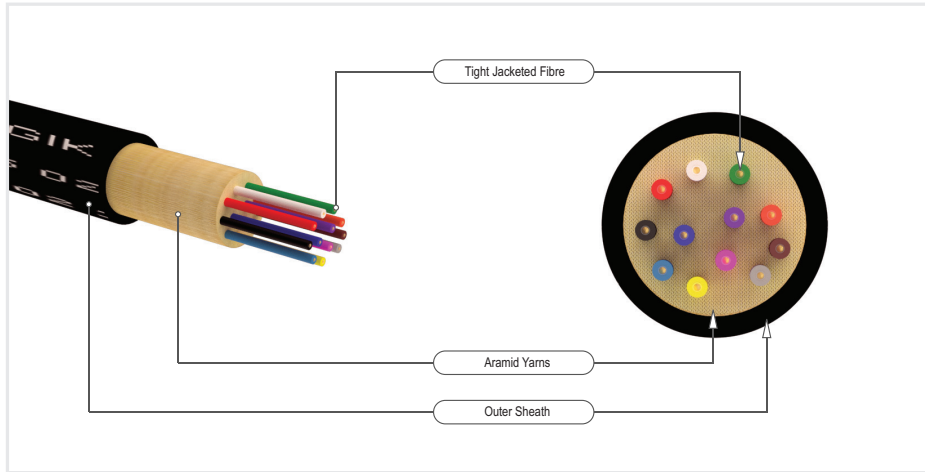

Standards Compliance :

Telecordia GR-20, IEC 60794, EIA/TIA, ITU-T, EN187000, RUS1755.900

Applications :

Indoor, Ducts/Conduits, Local loop, Broadband network

Advantages:

Good bending performance, High tensile strength, tight structure, light weight, Small Dimension, Facilitates flexible installations

Cable Construction Details

Parameter	Dimensions	Type, Color																								
Number of tight jacketed Fibers	24	Color	Bl	Or	Gr	Br	Sl	Wh	Rd	Bk	Yi	Vi	Pi	Ag	Bl*	Or*	Gr*	Br*	Sl*	Wh*	Rd*	Bk*	Yi*	Vi*	Pi*	Ag*
	12	Color	Bl	Or	Gr	Br	Sl	Wh	Rd	Bk	Yi	Vi	Pi	Ag												
	8	Color	Bl	Or	Gr	Br	Sl	Wh	Rd	Bk																
	6	Color	Bl	Or	Gr	Br	Sl	Wh																		
	4	Color	Bl	Or	Gr	Br																				
	2	Color	Bl	Or																						
Tight Jacketing over Fiber	850 ± 50 µm	LSZH																								
Peripheral Strength Member	---	Aramid Yarn																								
Outer Sheath	0.9 mm (Nominal)	LSZH - Black																								
	24F	12F	8F	6F	4F	2F																				
Overall Cable Diameter	8.5 ± 0.3 mm	6.8 ± 0.5 mm	6.5 ± 0.3 mm	6.0 ± 0.3 mm	5.4 ± 0.3 mm	4.5 ± 0.5 mm																				
Cable Weight	60.0 kg (Nom)	45.0 kg (Nom)	35.0 kg (Nom)	30.0 kg (Nom)	25.0 kg (Nom)	20.0 kg (Nom)																				

* Longitudinal stripe making on the next 12 colors

TIGHT JACKETED FIBER CABLE

Optical Fibre Characteristics		
Fibre Type		62.5 µm (OM1)
Attenuation	at 850 nm	≤ 3.2 dB/km
	at 1300 nm	≤ 1.2 dB/km
Bandwidth	850 nm	≥ 200 MHz.km
	1300 nm	≥ 600 MHz.km
Core Diameter		62.5 ± 2.5 µm
Core Cladding Concentricity Error		≤ 1 µm
Cladding Diameter		125 ± 1 µm
Cladding Non-circularity		≤ 1 %
Coating Diameter		250 ± 15 µm

Cable Mechanical Characteristics						
Cable Type	24F	12F	8F	6F	4F	2F
Tensile Strength	1000 N	800 N	600 N	600 N	600 N	600 N
Crush Resistance	500 N	500 N	500 N	500 N	500 N	500 N
Impact Resistance	5 Nm	5 Nm	5 N.m	5 N.m	5 N.m	5 N.m
Minimum Bend Radius	20 x D	20 x D	10 x D	10 x D	10 x D	10 x D

Temperature Performance	
Installation	-20 °C to + 70 °C
Operation	-20 °C to + 70 °C
Storage	-20 °C to + 70 °C

ORDERING INFORMATION	
PART NUMBER	DESCRIPTION
TL-02F-62-TB	2 Fiber MM 62.5/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-04F-62-TB	4 Fiber MM 62.5/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-06F-62-TB	6 Fiber MM 62.5/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-08F-62-TB	8 Fiber MM 62.5/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-12F-62-TB	12 Fiber MM 62.5/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-24F-62-TB	24 Fiber MM 62.5/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH

TIGHT JACKETED FIBER CABLE