

Direct Splice Cabinet – 288F

Techlogiks wall mount fiber splice enclosure can support up to maximum 288 splicing with 24 splice trays which support 12 splicing per tray. It is design to installed in building entrance or data centers and Floor Telecom facilities / closets for cross-connection between the distribution cables and drop cables.





Cabinet Specifications

Dimensions	600mm x 600mm x 302mm
Weight	22.60 kgs.
Maximum numbers of splice trays	24
Number of splicing per tray	12
Protective sleeve	60mm
Outgoing ports	8 x PG29
Incoming ports	8 x PG16
Main body material	Cold rolled steel (1.2mm thickness)
Body color	RAL7035
Operating Temperature	-40°C to +60°C
Storage Temperature	-25°C to +55°C

DIRECT SPLICE CABINET

Dimensions:

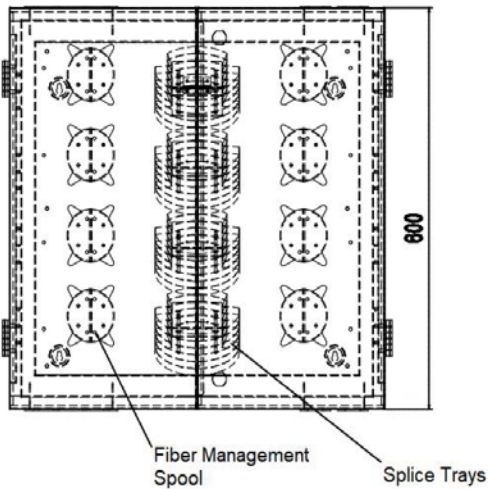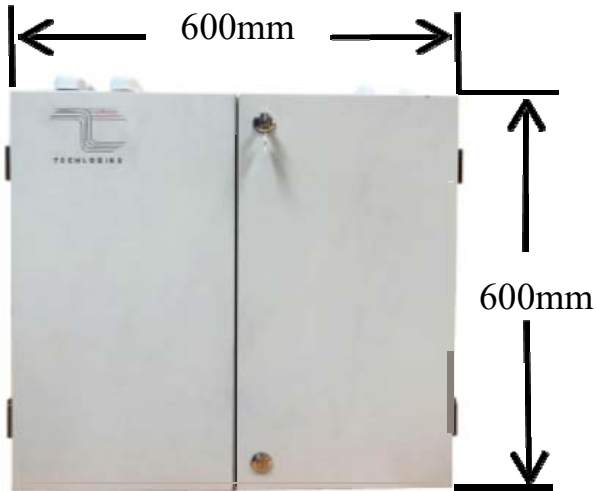

DIRECT SPLICE CABINET

Ordering Information

Part Number	Description
TL-FDB-288DS	288F Direct Splicing Wall mount Fiber Distribution Box with 24 splice trays support 12 Fibers