

Category 6 Floor Module LJ6C Style






Specification


Material:		
RJ45 Jack	Housing	ABS
RJ45 Contact	Material	Phosphor Bronze with Nickel Plated
	Finished	Min.3mm 3" Gold plated on contact area
IDC	Housing	ABS
	Terminal	Phosphor Bronze with 50" Tin – Lead plated. Over 50-60" Nickel plated
IDC CAP		ABS
PCB		FR4

Performance


T568A & T568B wiring sticker		
Insertion Force		20N max. (IEC 60603-7-4)
Retention Strength		7.7 kgs between Jack and Plug
Operation Temperature		-10°C to +60°C (ISO/IEC 11801, ANSI/EIA 568 C.2)
Life (Mating cycles)	Jack	750 Cycles min. (ISO/IEC 11801, IEC 60603-7-4)
	IDC	Suitable for 23 & 24 AWG stranded and solid wire compatible with 110 & Krone punch tools
The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 C.2 standard		

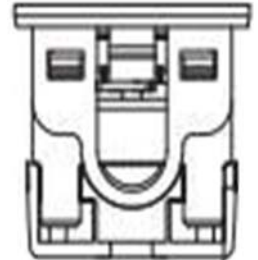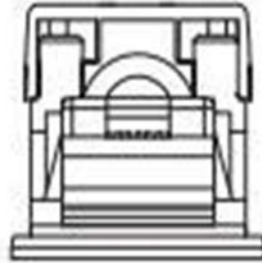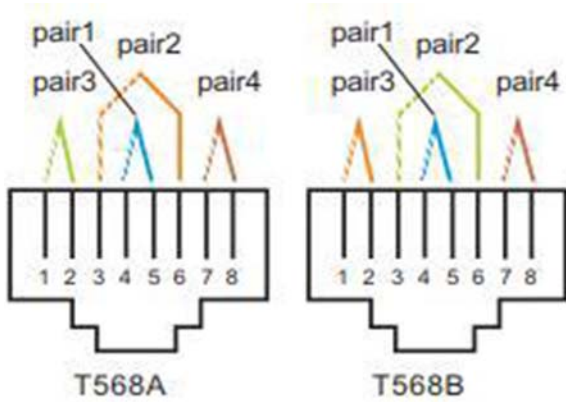



Top

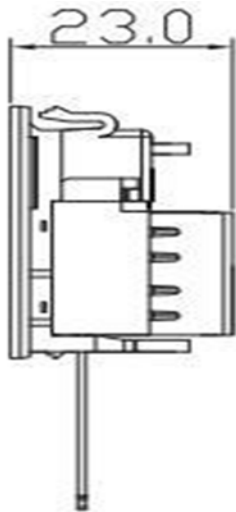

Right

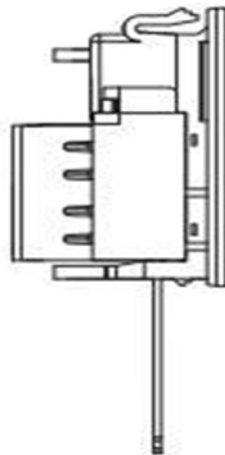

Left

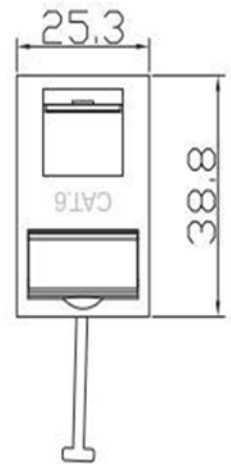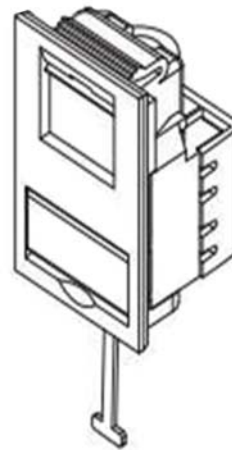

Front

Ordering Information

Part Number	Description
TL-LJ6C2538	Category 6 Floor Module LJ6C Style 25x38