


FIBER OPTIC ADAPTER

Single Mode Adapters

Techlogiks offers a wide range of optical couplers/adapters with various connector and Mounting options.

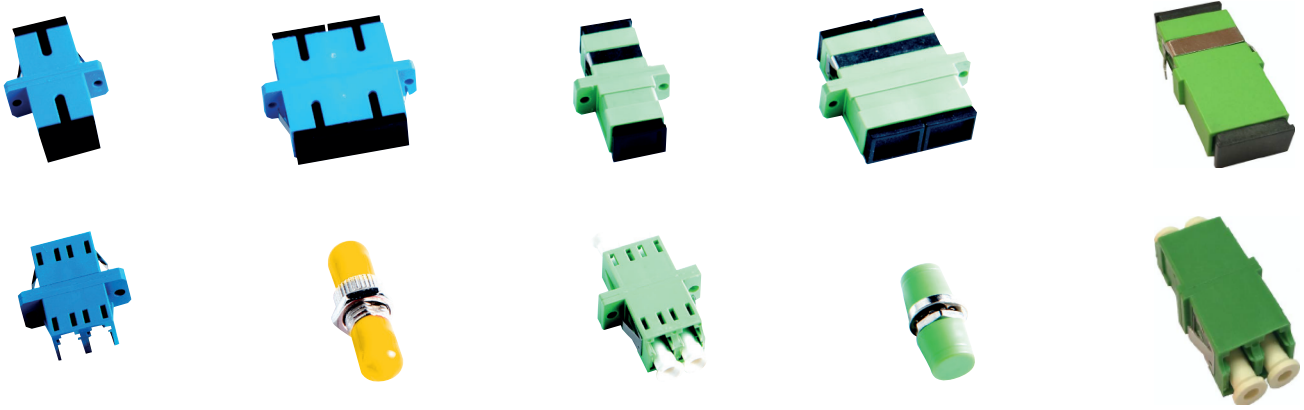

Features

- Plastic or metal housing
- Simplex, Duplex or Quadruple
- Complete line of connector types: eg, SC/ST/FC/LC/MTRJ/MU/MPO
- Hybrid versions available
- Low insertion loss
- High precision alignment.

Specifications

Insertion Loss	Max 0.30 dB
Durability IEC 61300-2-2	< 0.20 dB (500 cycles)
Operating Temperature	-40°C to +75°C

ORDERING INFORMATION

Part Number	Description
TL-FAP-SC-SM-SX	SC-SC Single Mode Simplex Fiber Optic Adaptor
TL-FAP-SC-SM-DX	SC-SC Single Mode Duplex Fiber Optic Adaptor
TL-FAP-SCSC/APC-SM-SX	SC/APC-SC/APC Single Mode Simplex Fiber Optic Adaptor
TL-FAP-SCSC/APC-SM-DX	SC/APC-SC/APC Single Mode Duplex Fiber Optic Adaptor
TL-FAP-LC-SM-DX	LC-LC Single Mode Duplex Fiber Optic Adaptor
TL-FAP-LCLC/APC-SM-DX	LC/APC-LC/APC Single Mode Duplex Fiber Optic Adaptor
TL-FAP-LC-SM-QD	LC-LC Single Mode Quad Fiber Optic Adapter
TL-FAP-LCLC/APC-SM-QD	LC/APC-LC/APC Single Mode Quad Fiber Optic Adapter
TL-FAP-SCSC/APC-SM-SX-SL	SC/APC-SC/APC Single Mode Simplex Snaggles Fiber Optic Adaptor
TL-FAP-LCLC/APC-SM-DX-SL	LC/APC-LC/APC Single Mode Duplex Snaggles Fiber Optic Adaptor
TL-FAP-XX-SM-YY, TL-FAP-XX-SM-YY-SL	
XX-SC, LC, FC, ST, LC/APC, SC/APC, ST/APC, FC/APC etc... YY-SX for Simplex, DX for Duplex, QD for Quad	